

Ti



Kcaf_lga_j Jm_b
Cl f_lacb





Mechanical Characteristics

Acjj Rwnc	L +rwnc Km lm+apwqr_jjg lc
Lm, md acjjq	/10 44 Ô 0'
Bgk c lqgm lq	0160 Ô //12 Ô 13 k k
Ucgefr	06,0 ie
Dpm l r Ej_qq	1,0 k k * ? l r g + p c c a r g m l A m _ r g l e * F g e f R p _ l q k g q q g m l * J m u g p m l * R c k n c p c b E j _ q q
Dp_k c	? l m b g x c b ? j s k g l g s k ? j j m w
Hs l a r g m l @ m v	6N46 P _ r c b
Npmrc a r g m l A j _ q q	A j _ q q 66
6CA D g p c R w n c	A j _ q q A
A m l l c a r m p R w n c	H l . 1 K - K A 2 - M r f c p q
Msrnsr A _ ` j c q	2, . k k ° &) ' 8 2 . . k k * & + ' 8 0 . . k k m p A s q r m k g x c b J c l e r f

Packaging Configuration

N_jjcr Bgk c lqgm lq	0174 Ô // . Ô /03/ k k
N_aigle bcr_gj &Rum n_jjcrq; Mlc qr_ai'	1/ naq-n_jjcrq* 40 naq-qr_ai* 40. naq- 2. %FO Aml r_g l cp

Specifications (STC)


K_vg k s k Nmucp'' Nk_vYUn[	4/ .	4/3	40.	403	41.	413
K_vg k s k Nmucp Tmjrec'' Tk nYT[	2.,34	2.,51	2.,7.	2/, .5	2/,01	2/,17
K_vg k s k Nmucp Asppc l r'' Gk nY?[	/3, .2	/3,/.	/3,/4	/3,00	/3,06	/3,12
Mnc l +agpasr Tmjrec'' Tma YT[	26,41	26,57	26,73	27,/1	27,05	27,21
Q f m p r + a g p a s r A s p p c l r'' G q a Y ? [	/4, . /	/4, . 6	/4,/3	/4,00	/4,07	/4,14
Kmbsjc C agc l a w Q R A Y # [	00,36	00,55	00,73	01,/2	01,10	01,3/
Nmucp Rmjcp_ l a c	.) 1 #					
Rc k n c p _ r s p c A m c agc l r q m d N k _ v	+.,07 # --A					
Rc k n c p _ r s p c A m c agc l r q m d T m a	+.,03 # --A					
Rc k n c p _ r s p c A m c agc l r q m d G q a	.,.23 # --A					

QRA8 gpp_bq_ l a c / . . . U - k ° A c j j R c k n c p _ r s p c 03-A* ?K ; / , 3

Application Conditions

Mncp_rj l e Rc k n c p _ r s p c	+2. -A) 5. -A
K_vg k s k Qwgrc k Tmjrec	/ . . . - / 3 . . T B A & C A '
K_vg k s k Qcpgcq Dsqc P_rj l e	1. ?

Engineering Drawings

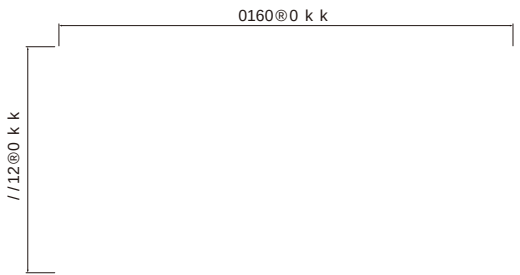

(L m r c l D m p q n c a g a b g k c l q g m l q _ l b r m j c p _ l a c p _ l e c q ' n j c _ q c
p c d c p r m r f c a m p p c q n m l b g l e b c r _ g j c b k m b s j c b p _ u g l e q,

Electrical Performance

